

rigid or telescopic

for Elypso and Combi Valves

| Order no. | Version | Pipe cover depth | for dimensions/DN | | | | | | | | | | |
|-----------|------------------|------------------|-------------------|----|----|-----|-----|-----|-----|-----|-----|-----|---------|
| | | | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 | 300 | 350 | 400-500 |
| 8970 | rigid | 0,75 m | ● | ● | ● | ● | ● | ● | | | | | |
| 8980 | rigid | 1,00 m | ● | ● | ● | ● | ● | ● | ● | ● | | | |
| 8990 | rigid | 1,25 m | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 9000 | rigid (standard) | 1,50 m | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 9010 | rigid | 2,00 m | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 9020 | rigid | 2,50 m | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 9512 | telescopic | 0,85 - 1,15 m | ● | ● | ● | ● | | | | | | | |
| 9512 | telescopic | 0,85 - 1,05 m | | | | | ● | ● | | | | | |
| 9500 | telescopic | 1,30 - 1,80 m | ● | ● | ● | ● | ● | ● | | | | | |
| 9500 | telescopic | 1,35 - 1,80 m | | | | | | | ● | | | | |
| 9500 | telescopic | 1,40 - 1,80 m | | | | | | | | ● | | | |
| 9500 | telescopic | 1,50 - 1,80 m | | | | | | | | | ● | ● | ● |
| 9510 | telescopic | 2,00 - 2,50 m | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |

for Service Valves
with threaded connections for spindle
DN 3/4" — 2"

| Order no. | Version | Pipe cover depth | |
|-----------|------------------|------------------|---|
| 9041 | rigid | 0,75 m | ● |
| 9051 | rigid | 1,00 m | ● |
| 9091 | rigid | 1,25 m | ● |
| 9101 | rigid (standard) | 1,50 m | ● |
| 9111 | rigid | 2,00 m | ● |
| 9121 | rigid | 2,50 m | ● |
| 9613 | telescopic | 0,60 - 0,80 m | ● |
| 9612 | telescopic | 0,80 - 1,20 m | ● |
| 9601 | telescopic | 1,30 - 1,80 m | ● |
| 9611 | telescopic | 2,00 - 2,50 m | ● |

Extender for rigid spindle


Order no. 7830 price for 1st m

Order no. 7831 price for each additional 0,5 m

Please specify dimension and length on order


for Service Valves

for Valves and Combi-T

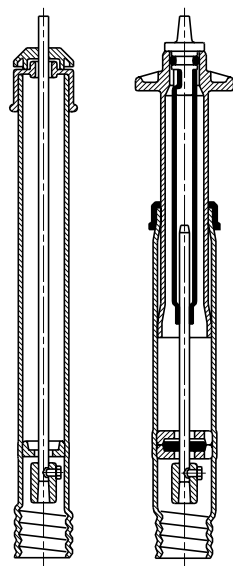

rigid

telescopic

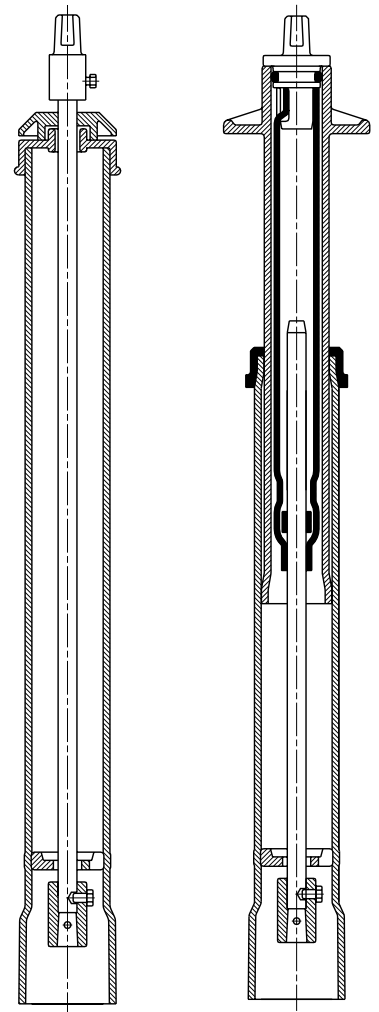

rigid


telescopic

Extension Spindles

rigid or telescopic

The telescopic extension spindle can be progressively adjusted to the ground level. This is done by pushing or pulling the tube and the spindle shaft.

The telescopic effect protects the pipe and fitting from surface impact. Supplied with or without surface box and base plate.

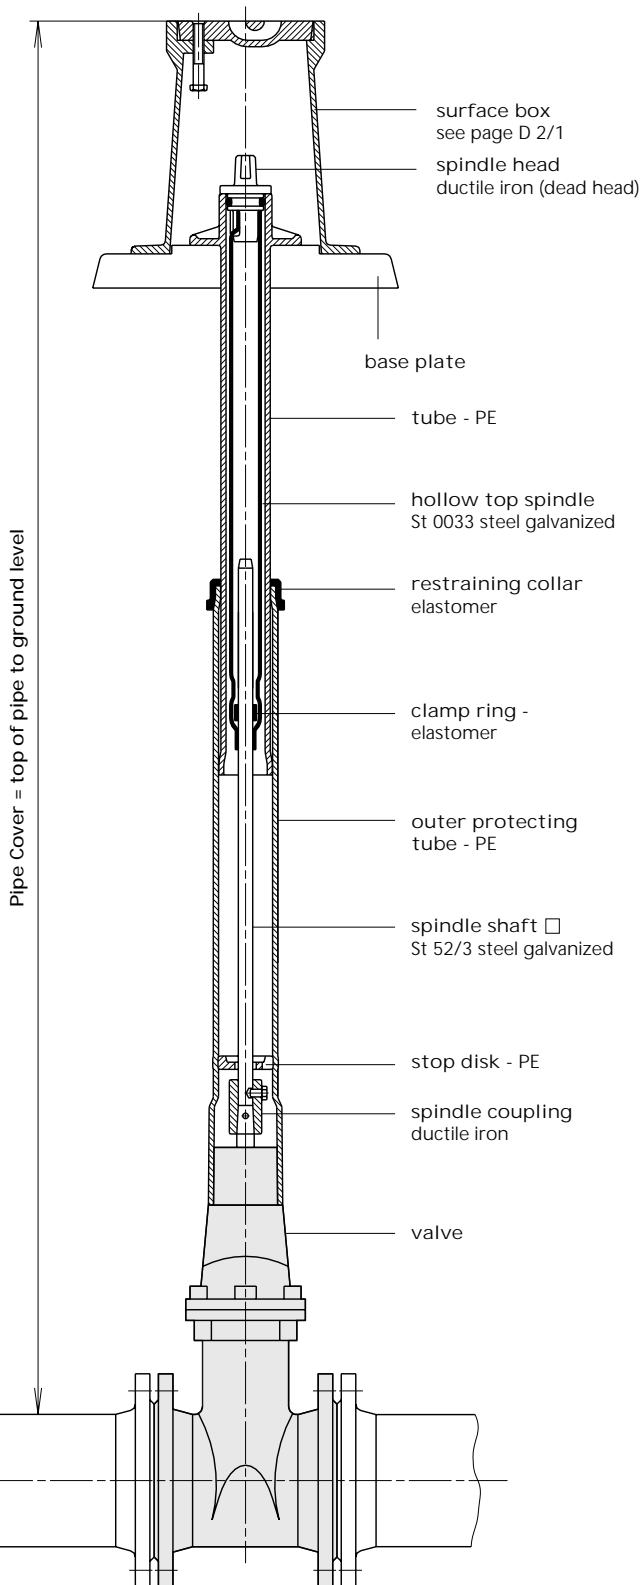

| Spindle head | |
|------------------------------------|-------------------------------------|
| for Service Valves | a 13,0 mm b 15,0 mm c 24,0 mm |
| for Elypso and Combi Valves | a 27,0 mm b 32,0 mm c 48,0 mm |

Weight of Extension Spindle for Elypso and Combi Valves

| DN | Weight kg for Order no. | | | | | | | | |
|---------|-------------------------|------|------|------|------|-------|------|-------|------|
| | 8970 | 8980 | 8990 | 9000 | 9010 | 9020 | 9500 | 9510 | 9512 |
| 50 | 2,40 | 3,30 | 4,50 | 5,50 | 7,50 | 9,80 | 6,60 | 9,30 | 4,20 |
| 65 | 2,40 | 3,30 | 4,50 | 5,50 | 7,50 | 9,80 | 6,60 | 9,30 | 4,20 |
| 80 | 2,50 | 3,40 | 4,60 | 5,60 | 7,50 | 9,80 | 6,70 | 9,40 | 4,20 |
| 100 | 2,70 | 3,60 | 4,80 | 5,80 | 7,80 | 10,10 | 6,90 | 9,60 | 4,50 |
| 125 | 2,30 | 3,30 | 4,30 | 5,30 | 7,30 | 9,50 | 6,60 | 9,10 | 3,70 |
| 150 | 2,30 | 3,30 | 4,30 | 5,30 | 7,30 | 9,50 | 6,60 | 9,10 | 3,70 |
| 200 | | 3,00 | 4,00 | 4,90 | 7,00 | 9,20 | 6,30 | 9,00 | |
| 250 | | 3,20 | 4,70 | 6,10 | 9,10 | 12,30 | 7,30 | 11,10 | |
| 300 | | 2,90 | 4,40 | 5,90 | 8,80 | 12,00 | 6,90 | 10,70 | |
| 350 | | | 4,00 | 5,50 | 8,50 | 11,60 | 6,60 | 10,30 | |
| 400-500 | | | 3,60 | 5,00 | 8,00 | 11,00 | 6,20 | 9,80 | |

Weight of Extension Spindle with threaded connection for Service Valves

| DN | Weight kg for Order no. | | | | | | | | | |
|-----------|-------------------------|------|------|------|------|------|------|------|------|------|
| | 9041 | 9051 | 9091 | 9101 | 9111 | 9121 | 9601 | 9611 | 9612 | 9613 |
| 3/4" - 2" | 1,20 | 1,70 | 2,20 | 2,70 | 3,70 | 4,70 | 3,50 | 4,90 | 2,40 | 1,60 |

Telescopic Extension Spindle