

Pipe Cutter

cuts PE and PVC pipes

Cuts pipes square and straight.

The lever design minimises the force required.

Order no.		for pipe Ø	Weight kg	
6050	Model I:	up to 1¼" or 40 Ø mm	0,30	●
	Model II:	up to 2" or 63 Ø mm	1,10	●




Chamfering Tool

for beveling PE pipes

For easy assembly of ISO push fit fittings the pipe should be beveled.

We recommend our precision-made steel chamfering tool. This provides the correct chamfer when turned clockwise a few times on the pipe end.

Order no.	Pipe Ø mm	DN	Weight kg	
6000	20	½"	0,07	●
	25	¾"	0,07	●
	32	1"	0,10	●
	40	1¼"	0,17	●
	50	1½"	0,22	●
	63	2"	0,62	●

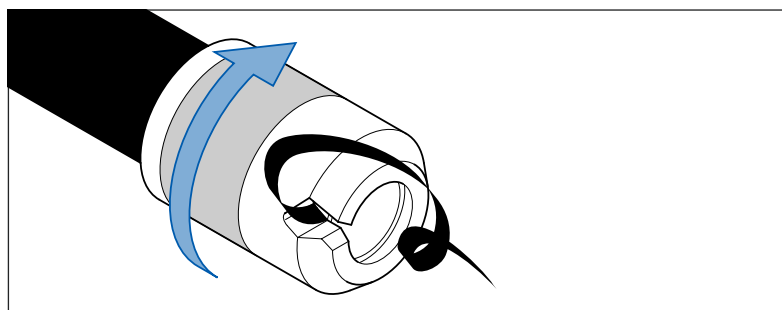

Saddle Blade

for shut-off saddles and shut-off adaptors

for under pressure drilling

Oder no.		Size	Weight kg	
8401	Model I:	for saddle 1" - 1¼"	0,20	●
	Model II:	for saddle 1½" - 2"	0,25	●



Tools

Extractors


for dismantling ISO push fit fittings

First ensure that the grip ring is not under tension. When pushed in, the extractors separate the grip ring from the pipe, which can then be pulled out.

Application:

for all Hawle products with ISO push fit fittings

Order no.	Pipe Ø mm	DN	Qty. Extractors	Weight kg	
6010	20	1/2"	2	0,02	●
	25	3/4"	2	0,04	●
	32	1"	2	0,05	●
	40	1 1/4"	2	0,07	●
	50	1 1/2"	2	0,10	●
	63	2"	2	0,17	●
	75		3	0,26	●
	90		3	0,32	●
	110		3	0,40	●
	125		3	0,48	●
	140		3	0,54	●
160		3	0,65	●	

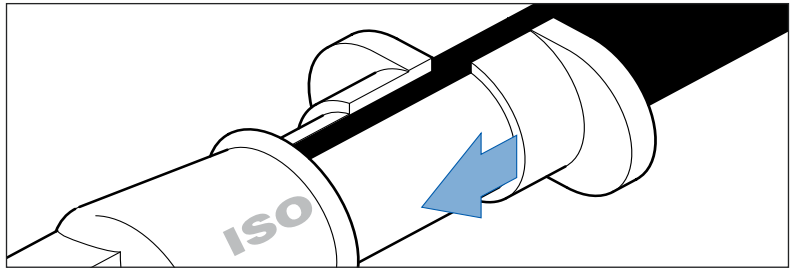


Hydrant-Master Universal Key

lightweight - robust - practical

of aluminium and ductile iron with reversible ratchet

- for opening and closing
- for operating coupling caps A + B + C
- for operating hose couplings B + C
- for breaking theft indicator caps

Order no.	Weight kg	
3461	1,65	●

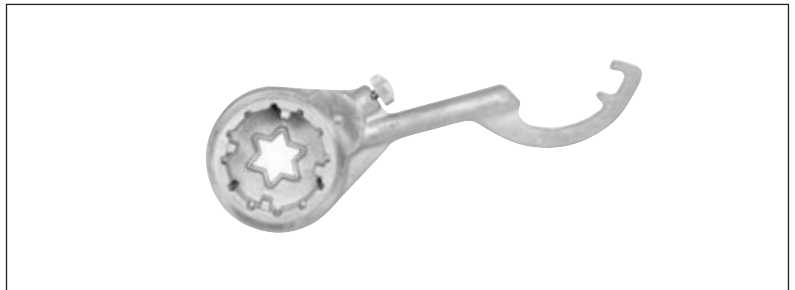

Operating Key

Order no.	for	Length mm	Weight kg	
3410	Service Valves	830	2,00	●
3420	Valves and Below Ground Hydrants	1227	4,10	●
3460	Above Ground Hydrants	420	1,25	●

