

Order no.	Version	PN	Dimension/DN										
			40	50	65	80	100	125	150	200	250	300	
9910	with stainless steel double-screen	16	●	●	●	●	●	●	●	●	●	●	●

The fine-meshed double screen made from stainless steel reliably restrains all parts bigger than 0,5 mm (DN 40 - DN 150 mm) or bigger than 0,6 mm Ø (DN 200 - 300 mm).

Face-to-face dimension according to EN 558-1 GR 1 (DIN 3202 T1 - F1)

Material:

Body and lid:
grey iron, epoxy powder coated

Bolts and nuts:
stainless steel

Double screen:
stainless steel, standard
mesh-size: DN 40 – 150: ca. 0,5 mm
DN 200 – 300: ca. 0,6 mm

Gasket:
Klingerit




Installation Instructions:

- In general Strainers are designed to be installed in horizontal pipe lines. An installation in sloping and vertical pipe lines is possible if the flow of the medium is downwards.
- Direction of flow has to be according to the arrow indicated on the body whereby the lid has to look to the bottom.

Strainer

No. 9910

with stainless steel double-screen

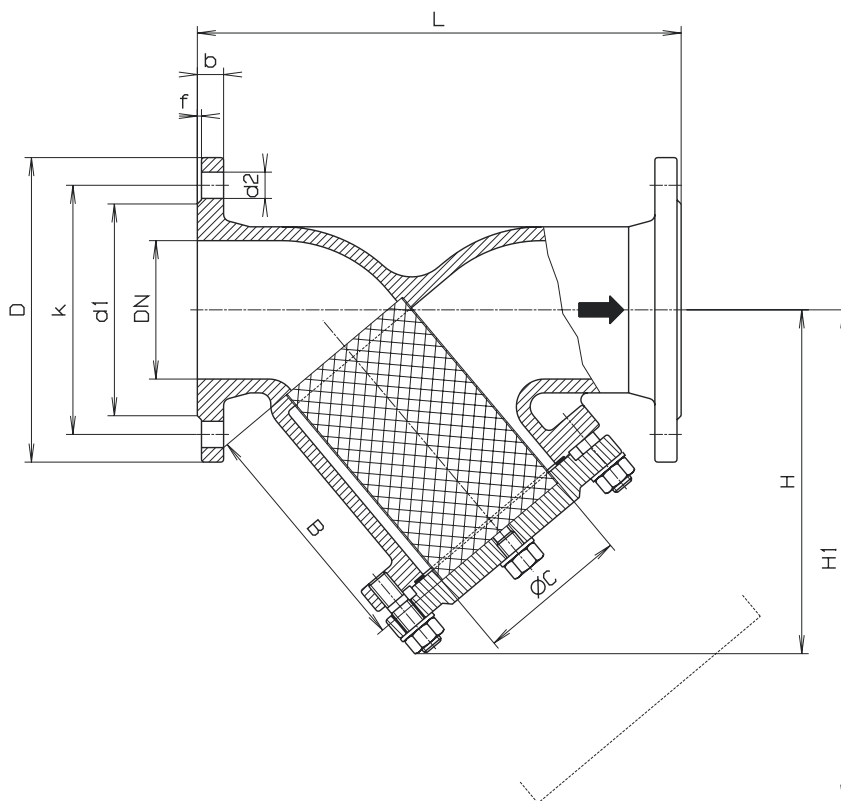

Flanges to DIN EN 1092-2, drilled to DIN 2501-PN 10 (standard); for DIN 2501-PN 16 in sizes of DN 200 mm and above please specify on order; other standards on request!

DN	PN	L	H	H 1	D	d 1	B	C	k	d 2	f	b	Bolts	Weight kg
40	16	200	150	240	150	88	114	50	110	18	3	18	4 x M 16	8,8
50	16	230	160	250	165	102	119	62	125	18	3	20	4 x M 16	11,0
65	16	290	180	285	185	122	134	79	145	18	3	20	4 x M 16	17,0
80	16	310	215	330	200	138	149	90	160	18	3	22	8 x M 16	19,5
100	16	350	235	365	220	158	169	110	180	18	3	24	8 x M 16	34,0
125	16	400	280	425	250	188	199	138	210	18	3	26	8 x M 16	42,5
150	16	480	320	480	285	212	224	160	240	22	3	26	8 x M 20	56,0
200	10	600	405	610	340	268	284	210	295	22	3	30	8 x M 20	110,0
	12 x M 20													
250	10	730	540	915	405	320	434	258	350	22	3	32	12 x M 20	165,0
	355								26				12 x M 24	
300	10	850	680	1110	460	370	555	308	400	22	4	32	12 x M 20	285,0
	410								26				12 x M 24	